product sheet



10 kg / 22 lb load per cycle.

P/N 1000651



Accessories

☐ Stands for potato peelers

□ Filters for potato peelers M / PI / PES

SPECIFICATIONS

Hourly production: 200 kg/240 kg

Capacity per load: 10 kg Timer (min-max): 0' - 6' Total loading: 550 W

Electric power supply (V) : $230 \text{ V} / 50 \text{ Hz} / 1 \sim / (3.5 \text{ A})$

External dimensions (W x D x H)

- √ Width: 435 mm
- ✓ Depth: 635 mm
- √ Height: 668 mm

External dimensions with stand

- √ Width with stand: 433 mm
- ✓ Depth with stand: 638 mm
- ✓ Height with stand: 1040 mm

Net weight: 36 kg

Crated dimensions 670 x 470 x 810 mm Gross weight: 41.1 kg

SALES DESCRIPTION

- ✓ Stainless steel construction commercial potato peeler.
- Also suitable to peel carrots and other similar products.
- √ 0-6 min timer.
- Removable turntable for easy cleaning.

Robust and efficient construction

- √ Construction in stainless steel.
- √ Lateral stirrers covered with silicon carbide abrasive (approved by NSF)
- Aluminium base plate lined with silicon carbide abrasive (approved by NSF), easily removable for cleaning purposes.

User comfort

- √ 0-6 min timer.
- √ Possibility of continuous operation.

Maximum safety and hygiene

- ✓ Auto-drag of waste to the drain.
- BPA-free liftable transparent cover, complete with locking and safety device.
- Aluminium door with hermetic seal and safety device.
- Waterproof control board (IP65): Improved reliability against moisture and water splash.
- √ Water inlet system with non-return air break.
- ✓ Auxiliary contact for external electric valve.

Energy efficiency

 \checkmark Energy efficiency owing to engine optimisation.

OPTIONAL

Stainless steel floor stand.

☐ Filter with no-foam feature.









POTATO PEELER PI-10 230/50/1

10 kg / 22 lb load per cycle.

P/N 1000651

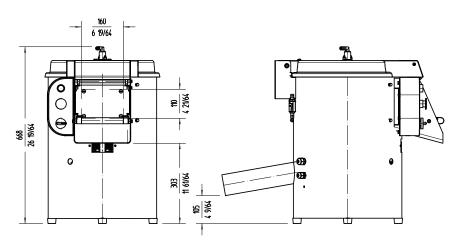



Sammic | www.sammic.com Food Service Equiment Manufacturer

Polígono Basarte, 1. 20720 Azkoitia, Spain phone +34 943 15 72 36 sales@sammic.com



Project	Date
Item	Qty

Approved